


GEM3 Max 16K 3D Printer

Find details with NOVA3D

NOVA3D

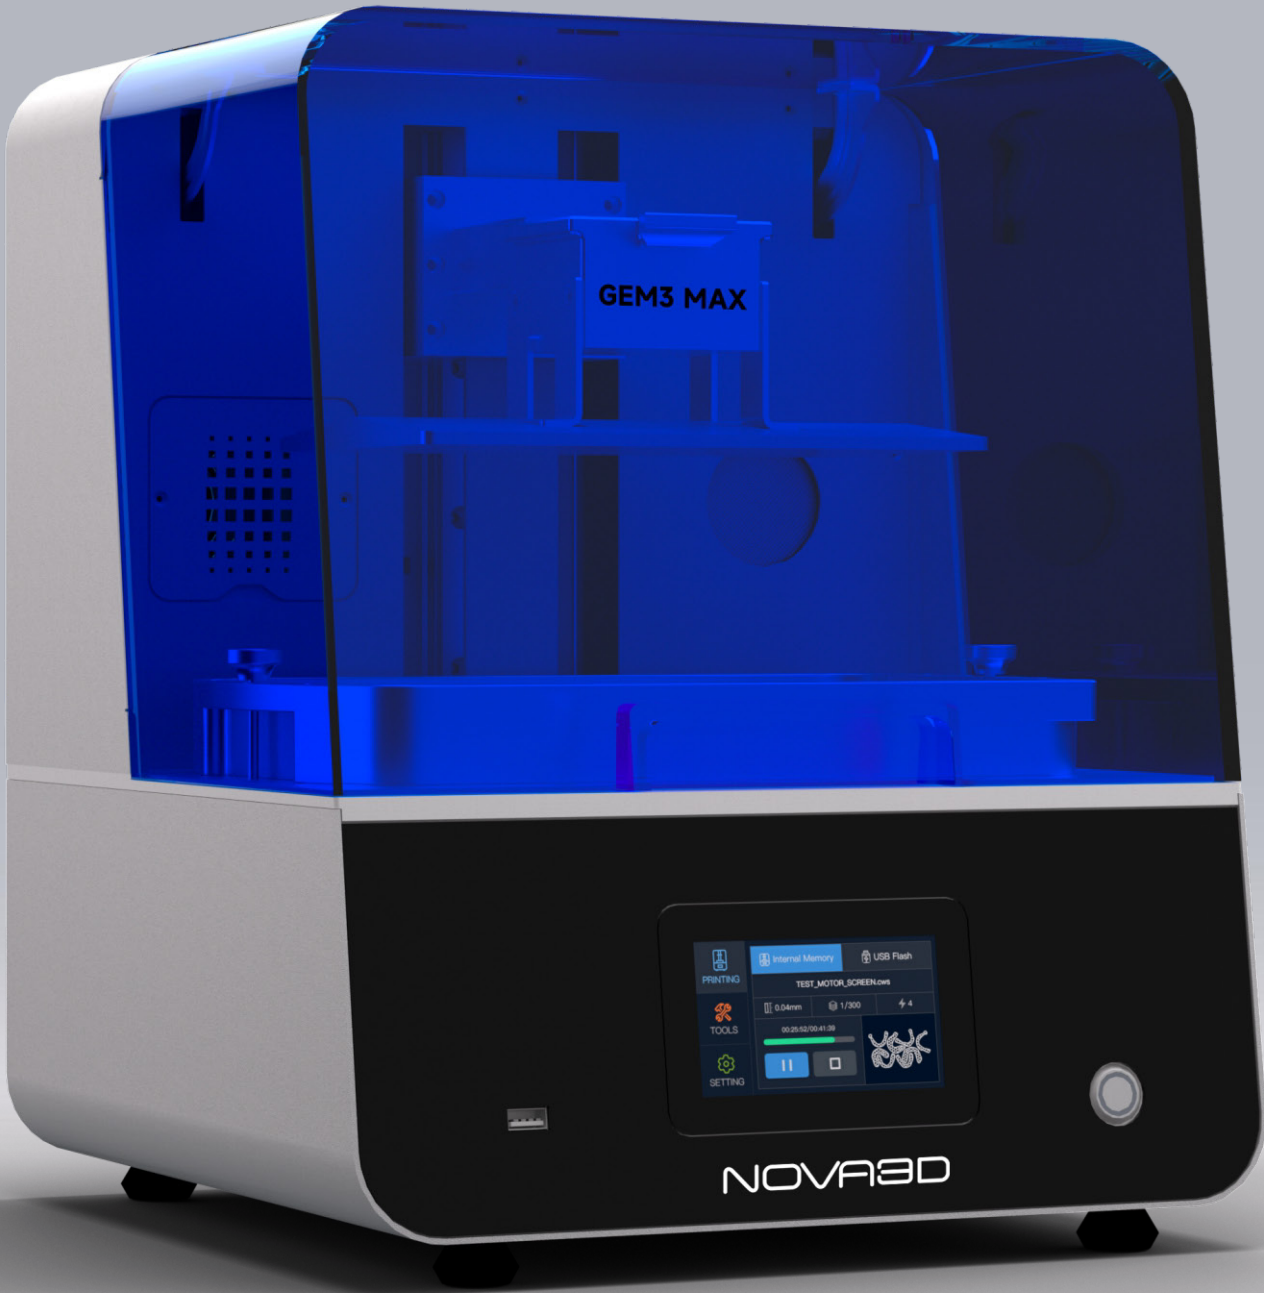

- * Ultra-HD Exposure System: 15120×6230 ultra-high resolution, micron-level 14×19μm imaging units ensure high-fidelity reproduction of complex models.
- * UV Optical Uniformity Optimization: Patented optical module ensures consistent full-area exposure.
- * Multi-Angle Hinged Lid: Hinge structure allows lid suspension at any angle for convenient operation and space efficiency.
- * Smart Temperature Control: Closed-loop system maintains a stable environment, reducing shrinkage and warping.
- * Activated Carbon Filtration: Replaceable honeycomb filter adsorbs VOCs for odor-free printing.
- * High-Precision Ball Screw: Industrial-grade C5 ball screw ensures long-term stability.

Specification:

Technology	MSLA/UV LCD	
Light Source System	Light Source	7th- gen COB + Light homogenizer 4th- gen integrated air- cooling system
	Optical Power Intensity	5000uw/ cm ²
	UV Wavelength	405nm
Exposure System	Resolution	15120*6230
	Pixel Size	14*19um
	Build Volume	211*118*120mm
Speed	Layer Thickness	20um~200um(20μm increments)
	Printing Speed	70mm/ h
Motion System	Lead Screw	Industrial ball screw
	Linear Rails	linear rails
	Motor	Industrial Stepper Motor
Power	Power Supply	External adapter
	Input	100- 240V~ 50/60Hz 2 A
	Output	24VDC/6.25A
3D Printer	Printer Dimensions	358*379*473mm
	Packing Dimensions	502*512*642mm
	Net Weight	29kg
	Gross Weight	34kg
	Operating Temp	20- 30° C 68- 104° F
Software	Slicers	ChituBox, NovaMaker
	File Format	.stl, .obj
	Supported OS	Mac OS X/ Windows